

Product Code	Description
JC812USBA-W	2 Gang 2A 240V USB Charger



JC812USBA-W-LWH



Product back view

Technical Specification

- USB Charger Module W8301USBA# X 2
- Input Voltage: 100-240VAC, 50/60Hz
- Input Current: 500mA max.
- Output: 5VDC, 2A max. each*
- Protection: Overload, short-circuit, over-heat protected
- Recommended wire size:
0.5mm² - 1.5mm²
- Fix Centre: 60.3 mm
- Fix Screw: M3.5 x 0.6 x 25mm±


With Lavina '95 Frame: JC1401

- Dimensions: 95x95x10mm (WxHxD)
- Mounting box: >40mm depth
 - J1040, flush mounting, plastic
74.5 x 74.5 x 42mm (W x H x D)
 - M1050, flush mounting, metal
75.5 x 64 x 50mm (W x H x D)
- Comply to Standards:
BSEN 60950-1/IEC 62368-1
GB 4943.1-2011

Refer to the DS-020173 Deco datasheet for detailed information


* Derating might be necessary when both modules are operating at maximum output due to elevated enclosure temperatures.

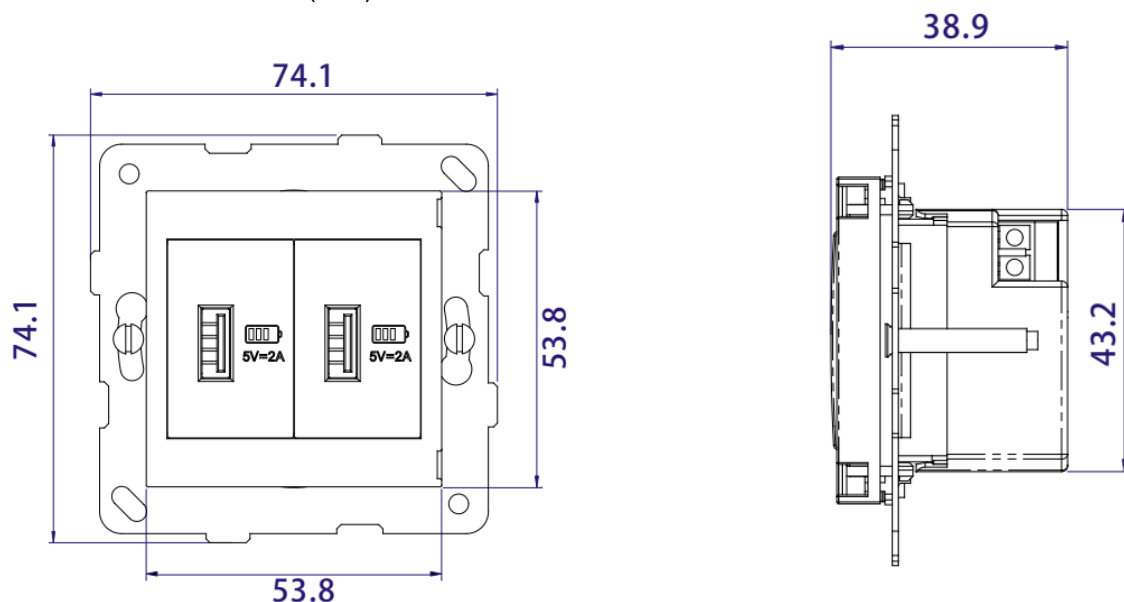

Product dimensions (mm)



Mounting Diagram

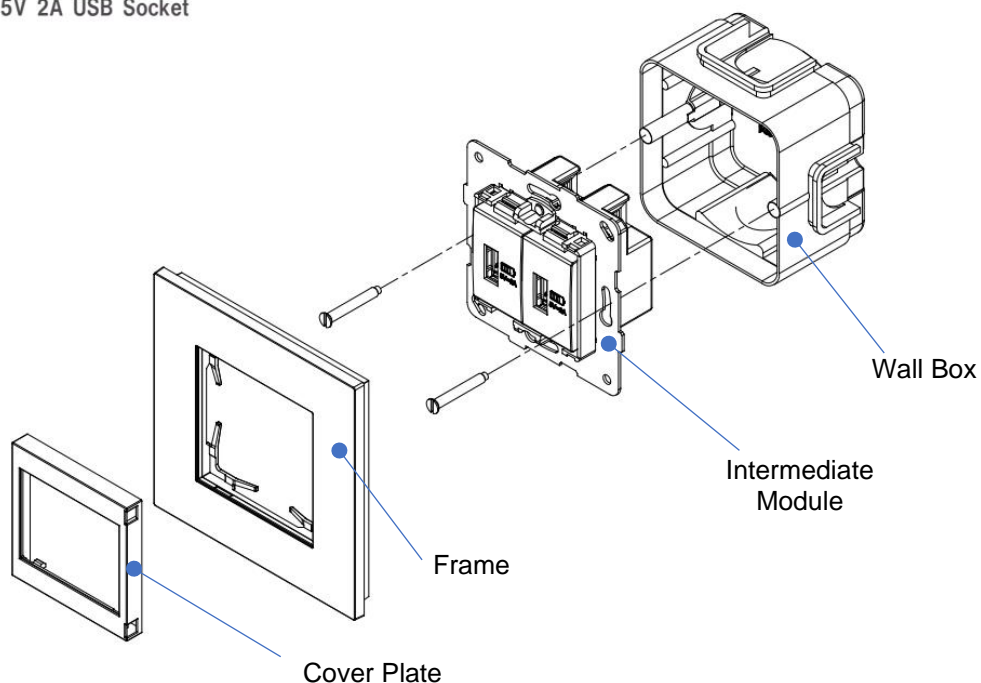Dual 5V 2A USB Socket



Product Code	Colour
JC812USBA-W-LWH	 Matt White
JC812USBA-W-LBL	 Matt Black
For other colours, please contact T&J Sales representative	