


Product Code	Description
K8513SUSBC-D	13A 250V Switched BS Socket Outlet & Twin USB Charger (USB-A + USB-C, 2.1A Max)



K8513SUSBC-D



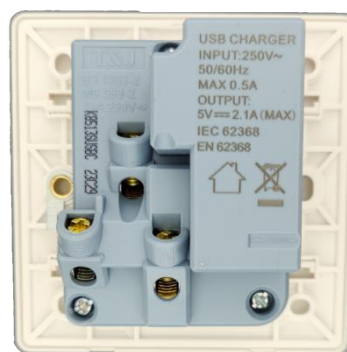


Product back view

Technical Specification

- Socket rated voltage:
250VAC, 50/60Hz
- Socket rated current: 13A
- USB Charger input supply:
250V 50/60Hz, 0.5A max.
- USB Charger output:
5VDC/2.1A max.
(USB-A, USB-C Shared)
- USB Charger with built-in over-heat, overload and short-circuit protection
- Recommended wire size:
2.5mm² - 4mm²
- Dimensions: 86 x 86 x 5mm (WxHxD)
- Fix Centre: 60.3mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >35mm depth
 - R1150, flush mounting, plastic
(80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:
BS1363-2
IEC62368-1
SS145-2
MS589-2
EN62368-1

Note:

Disconnect before Insulation Resistance test to avoid injecting high test voltage across the USB Charger.

Product Code	Colour	
K8513SUSBC-D		White
K8513SUSBC-SBL-D		Matt Black (SBL)
K8513SUSBC-MSB-D		Matt Silver Black (MSB)
<i>For other colours, please contact T&J Sales representative</i>		