

Product Code	Description
GC220L	20A 1 Gang DP Switch with Neon



GC220L-BSGE




Product back view

Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 20AX
- Recommended wire size:
4mm² - 6mm²
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:
-5°C to +40°C
- Indicator Light: Red Neon
- Dimensions: 86 x 86 x 4mm (WxHxD)
- Fix Centre: 60.3mm
- Fix Screws (2x each):
M3.5 x 0.6 x 25mm±
M3.5 x 0.6 x 30mm±
- Mounting box: >25mm depth
 - R1150, flush mounting, plastic
(80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal
(79 x 73 x 47mm) (WxHxD)
- Comply to Standards:
GB 16915
IEC 60669-1
BS EN 60669

Typical Wiring

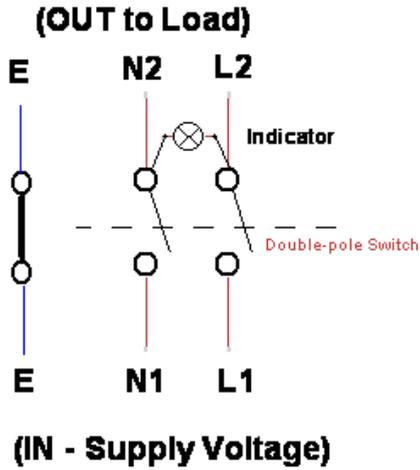

Note: For high current load application, use the ferrules/sheaths provided for wire terminations.

Product Code	Colour
GC220L-BFSS	 Black Interior, Stainless Steel, Fingerprint Proof, Statin Nickel
GC220L-BFMR	 Black Interior, Electroplated with Matt Brass, Fingerprint Proof, Satin Brass
GC220L-BSBL	 Black Interior, Matt Black
<i>For other colours, please contact T&J Sales representative</i>	