

Product Code	Description
G8318SUSB2-86	16A 250V Switched Universal Socket Outlet & Twin USB Charger (2.1A Max)



G8318SUSB2-86-BSBL




Product back view

Technical Specification

- Rated voltage: 250VAC, 50/60Hz
- Rated current: 16A
- USB Charger input supply: 250V 50/60Hz, 0.5A max.
- USB Charger output: 5VDC/2.1A max. (Shared)
- USB Charger with built-in over-heat, overload and short-circuit protection
- Recommended wire size: 2.5mm² - 4mm²
- Dimensions: 86 x 86 x 4 mm (WxHxD)
- Fix Centre: 60.3 mm
- Fix Screw: M3.5x0.6x30mm± x2
M3.5x0.6x25mm± x2
- Mounting box: > 35mm
 - R1150, flush mounting, plastic (80x80x48.4mm) (WxHxD)
 - M1247, flush mounting, metal (79x73x47mm) (WxHxD)
- Comply to standards: IEC 62368/IEC 60950-1 (USB Charger)

USB Charger module

- internally connected within socket

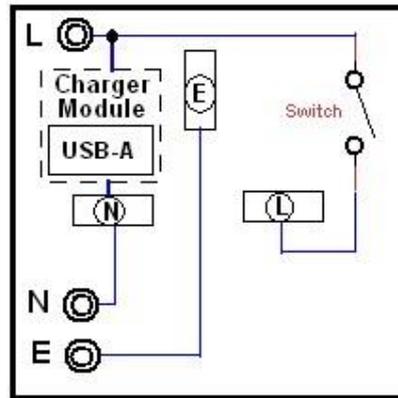

Applicable on selected type of plugs:

Plug	Description
2-pin Plug (Non-earth)	2.5A, 250V
2-pin Plug (Euro)	2.5A, 250V
2-pin Plug Round	10/16A, 250V
2-pin Plug (Non-earth)	10/16A, 250V
3-pin Plug (BS)	13A, 250V
3-pin Plug Round (BS)	5A, 250V
2-pin Australia Plug	7.5A, 250V
3-pin Australia Plug	10A, 250V
3-pin Australia Plug	15A, 250V
3-pin China Plug	6/10A., 250V
2-pin China Plug	6/10A., 250V

Product Code	Colour
G8318SUSB2-86-BFSS	 Black Interior, Stainless Steel, Fingerprint Proof, Satin Nickel
G8318SUSB2-86-BFMR	 Black Interior, Electroplated with Matt Brass, Fingerprint Proof, Satin Brass
G8318SUSB2-86-BSBL	 Black Interior, Matt Black
<i>For other colours, please contact T&J Sales representative</i>	