

| Product Code | Description                    |
|--------------|--------------------------------|
| G220L-90     | 20A 1 Gang DP Switch with Neon |



G220L-90-BlCP




Product back view

## Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 20AX
- Recommended wire size:  
4mm<sup>2</sup> - 6mm<sup>2</sup>
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:  
-5°C to +40°C
- Indicator Light: Red Neon
- Dimensions: 90 x 90 x 4mm (WxHxD)
- Fix Centre: 60.3mm
- Fix Screws (2x each):  
M3.5 x 0.6 x 25mm±  
M3.5 x 0.6 x 30mm±
- Mounting box: >25mm depth
  - R1150, flush mounting, plastic  
(80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal  
(79 x 73 x 47mm) (WxHxD)
- Comply to Standards:  
GB 16915.1  
IEC 60669-1  
BS EN 60669

## Typical Wiring

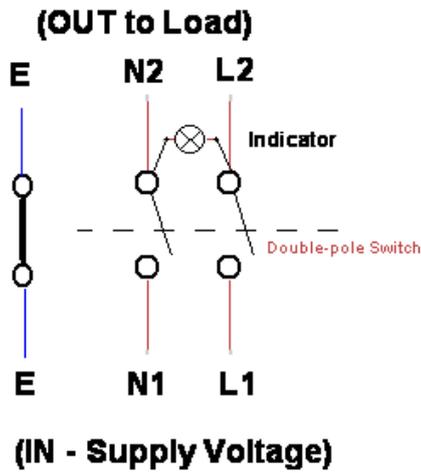

**Note:** For high current load application, use the ferrules/sheaths provided for wire terminations.

| Product Code  | Colour  |
|---|---|
| G220L-90-BFSS   |  Black Interior, Stainless Steel, Fingerprint Proof, Statin Nickel             |
| G220L-90-BFMR   |  Black Interior, Electroplated with Matt Brass, Fingerprint Proof, Satin Brass |
| G220L-90-BSBL   |  Black Interior, Matt Black  |
| <i>For other colours, please contact T&amp;J Sales representative</i> |   |