


| Product Code | Description              |
|--------------|--------------------------|
| HC2713       | 16AX 3 Gang 1 Way Switch |






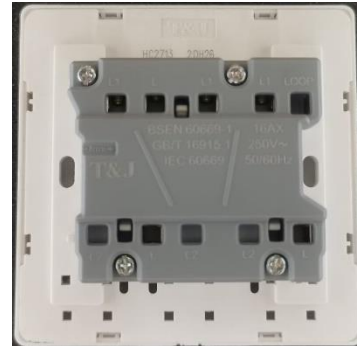

HC2713



Product back view

## Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 16AX
- Recommended wire size:  
2.5mm<sup>2</sup> - 4mm<sup>2</sup>
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:  
-5°C to +40°C
- IP Rating: IP2X
- No. of operations:  
40,000 operation at 16 Amp.
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >25mm depth
  - R1150, flush mounting, plastic  
(80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal  
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:  
BS EN 60669-1  
IEC 60669-1  
GB/T 16915.1

| Product Code   | Colour  |
|--|---|
| HC2713   |  White                   |
| HC2713-SBL   |  Matt Black (SBL)        |
| HC2713-MSB   |  Matt Silver Black (MSB) |
| HC2713-PS7   |  Dark Champagne (PS7)    |
| HC2713-ST5   |  Champagne Grey (ST5)    |
| <i>For other colour, please contact T&amp;J Sales representative</i> |   |

