



Product Code	Description
HC8613SDUSB-DP	13A 2 Gang DP Switched BS Socket Outlet with 2 Port USB Charger (3.6A Max)



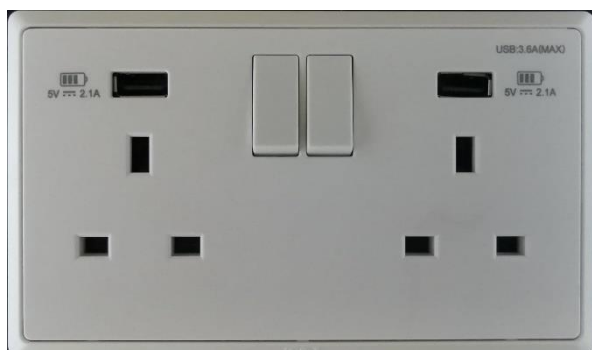


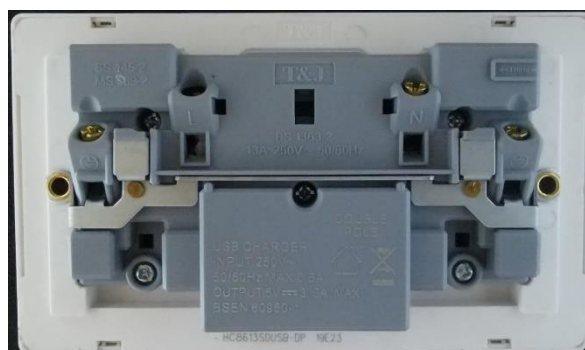

HC8613SDUSB-DP



Product back view

## Technical Specification

- Socket rated voltage: 250VAC, 50/60Hz
- Socket rated current: 13A
- USB Charger input supply: 250V 50/60Hz, 0.5A max.
- USB Charger output: 5VDC/3.6A max. (Shared)  
5VDC/2.1A max. (each USB port)
- USB Charger with built-in over-heat, overload and short-circuit protection
- Recommended wire size: 2.5mm<sup>2</sup> - 4mm<sup>2</sup>
- Double-pole switch (both L & N isolated from load when off)
- Dimensions: 146 x 86 x 10mm (WxHxD)
- Fix Center: 120.6mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >35mm depth
  - M1047D, flush mounting, metal (135 x 75 x 47mm) (WxHxD)
- Comply to standards: BS EN 62368-1  
BS 1363  
SS 145-2  
MS 589-2

Product Code	Colour
HC8613SDUSB-DP	 White
HC8613SDUSB-DP-SBL	 Matt Black (SBL)
HC8613SDUSB-DP-MSB	 Matt Silver Black (MSB)
HC8613SDUSB-DP-PS7	 Dark Champagne (PS7)
HC8613SDUSB-DP-ST5	 Champagne Grey (ST5)
<i>For other colour, please contact T&amp;J Sales representative</i>	

