

Product Code	Description
HC2732L	32A 1 Gang DP Switch with indicator light



HC2732L




Product back view

## Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 32A
- Recommended wire size:  
6mm<sup>2</sup> - 10mm<sup>2</sup>
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:  
-5°C to +40°C
- IP Rating: IP2X
- Indicator light: Red LED
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3 mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >25mm depth
  - R1150, flush mounting, plastic  
(80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal  
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:  
BS EN 60669-1  
IEC 60669-1

## Typical Wiring

(IN - Supply Voltage)

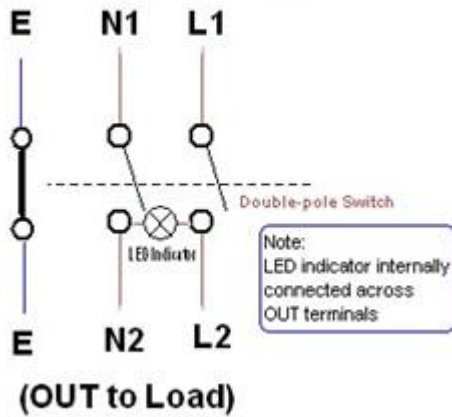

## Note:

For high current load application, use the ferrules/sheaths provided for wire terminations.



Product Code	Colour
HC2732L	White
HC2732L-SBL	Matt Black (SBL)
HC2732L-MSB	Matt Silver Black (MSB)
HC2732L-PS7	Dark Champagne (PS7)
HC2732L-ST5	Champagne Grey (ST5)
For other colour, please contact T&J Sales representative	

Multi-Gang Adaptor Frames		Product Dimension Scale: mm