

| Product Code | Description |
|--------------|-----------------------------|
| HC2711-B | 10A 1 Gang Bell Push Switch |



HC2711-B

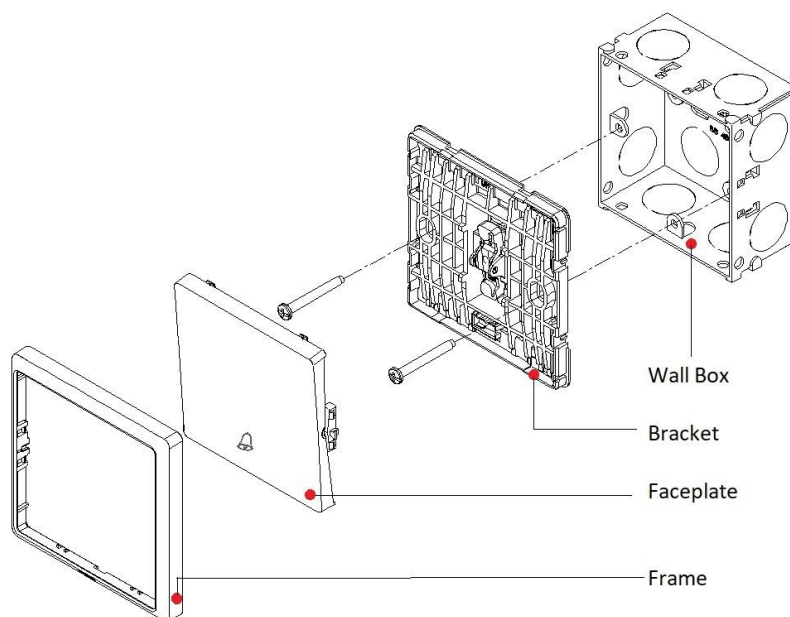







Product back view

Technical Specification

- Rated Voltage: 250V, 50/60Hz
- Rated Current: 10A
- Recommended wire size:
1.5mm² - 2.5mm²
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:
-5°C to +40°C
- IP Rating: IP2X
- No. of operations: 40,000 at 10 Amp.
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >25mm depth
 - R1150, flush mounting, plastic
(80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:
BS EN 60669-1
IEC 60669-1
GB/T 16915.1

Installation Method



| Product Code | Colour |
|--|---|
| HC2711-B |  White |
| HC2711-B-SBL |  Matt Black (SBL) |
| HC2711-B-MSB |  Matt Silver Black (MSB) |
| HC2711-B-PS7 |  Dark Champagne (PS7) |
| HC2711-B-ST5 |  Champagne Grey (ST5) |
| <i>For other colour, please contact T&J Sales representative</i> | |

