

Product Code	Description
HC8329S	5 Pin Socket with Switch; 2-pin 10A Euro-American & 3-pin 16A Universal Switched Socket Outlet



HC8329S




Product back view

## Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 10A (2-pin socket)  
16A (3-pin socket)
- Recommended wire size:  
1.5mm<sup>2</sup> - 2.5mm<sup>2</sup>
- Dimensions:  
86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >35mm depth
  - R1150, flush mounting, plastic (80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal (79 x 73 x 47mm) (WxHxD)
- Comply to standards:  
BS EN 60669-1  
GB/T 16915  
IEC 60884-1

## Typical Wiring:

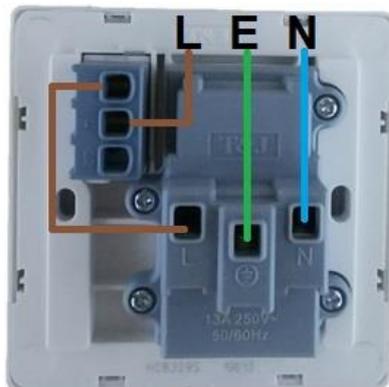

### Applicable on selected type of plugs:

Plug	Description
2-pin Plug (Non-earth)	2.5A, 250V
2-pin Plug (Euro)	2.5A, 250V
2-pin Plug Round	10/16A, 250V
2-pin Plug (Non-earth)	10/16A, 250V
3-pin Plug (BS)	13A, 250V
3-pin Plug Round (BS)	5A, 250V
2-pin Australia Plug	7.5A, 250V
3-pin Australia Plug	10A, 250V
3-pin Australia Plug	15A, 250V
3-pin China Plug	6/10A., 250V
2-pin China Plug	6/10A., 250V

Product Code	Colour
HC8329S	 White
HC8329S-SBL	 Matt Black (SBL)
HC8329S-MSB	 Matt Silver Black (MSB)
HC8329S-PS7	 Dark Champagne (PS7)
HC8329S-ST5	 Champagne Grey (ST5)
<i>For other colour, please contact T&amp;J Sales representative</i>	

