

Product Code	Description
HC2722L-DP	20AX 2 Gang 1 Way Double Pole Switch with indicator light



HC2722L-DP




Product back view

## Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 20AX
- SBL\* Load: 250W
- Recommended wire size:  
4mm<sup>2</sup> - 6mm<sup>2</sup>
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:  
-5°C to +40°C
- IP Rating: IP2X
- Indicator light: Blue LED
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3 mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >25mm depth
  - R1150, flush mounting, plastic  
(80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal  
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:  
BSEN 60669-1  
IEC 60669-1  
GB/T 16915.1

\*SBL- Self-Ballasted Lamp



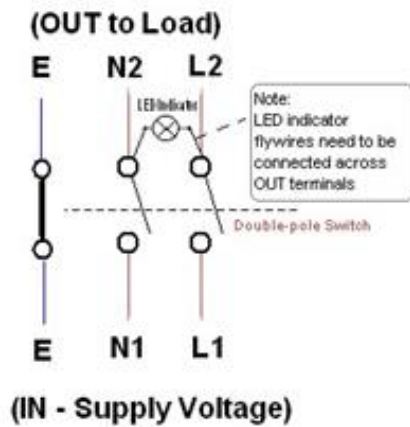


## Typical Wiring



## Note:

For high current load application, use the ferrules/sheaths provided for wire terminations.



Product Code	Colour
HC2722L-DP	 White
HC2722L-DP -SBL	 Matt Black (SBL)
HC2722L-DP -MSB	 Matt Silver Black (MSB)
HC2722L-DP -PS7	 Dark Champagne (PS7)
HC2722L-DP -ST5	 Champagne Grey (ST5)
For other colour, please contact T&J Sales representative	

Multi-Gang Adaptor Frames			Product Dimension Scale: mm
