

Product Code	Description
HC8318S	16A 1 Gang Universal Switched Socket Outlet



HC8318S-SBL




Product back view

Technical Specification



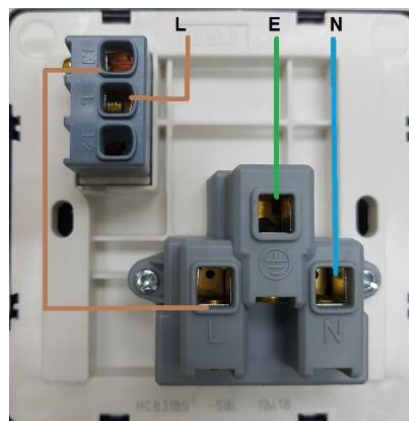


- Rated Voltage: 250V 50/60Hz
- Rated Current: 13A (3-pin BS plug)
- Recommended wire size:
1.5mm² - 2.5mm²
- Dimensions:
86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >35mm depth
 - R1150, flush mounting, plastic
(80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:
IEC 60884-1
IEC 60669-1
GB/T 16915.1

Typical Wiring



Applicable on selected type of plugs:

Plug	Description
2-pin Plug (Non-earth)	2.5A, 250V
2-pin Plug (Euro)	2.5A, 250V
2-pin Plug Round	10/16A, 250V
2-pin Plug (Non-earth)	10/16A, 250V
3-pin Plug (BS)	13A, 250V
3-pin Plug Round (BS)	5A, 250V
2-pin Australia Plug	7.5A, 250V
3-pin Australia Plug	10A, 250V
3-pin Australia Plug	15A, 250V
3-pin China Plug	6/10A., 250V
2-pin China Plug	6/10A., 250V

Product Code	Colour
HC8318S	 White
HC8318S-SBL	 Matt Black (SBL)
HC8318S-MSB	 Matt Silver Black (MSB)
HC8318S-PS7	 Dark Champagne (PS7)
HC8318S-ST5	 Champagne Grey (ST5)
<i>For other colour, please contact T&J Sales representative</i>	

