


Product Code	Description
HC4301V	6W 1 Gang Volume Switch with Override Control



HC4301V




Product back view

Technical Specification

- Rated wattage: 6W
- Over-ride control: 24VDC
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: > 35mm depth
 - R1150, flush mounting, plastic (80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal (79 x 73 x 47mm) (WxHxD)

Connection Diagram:

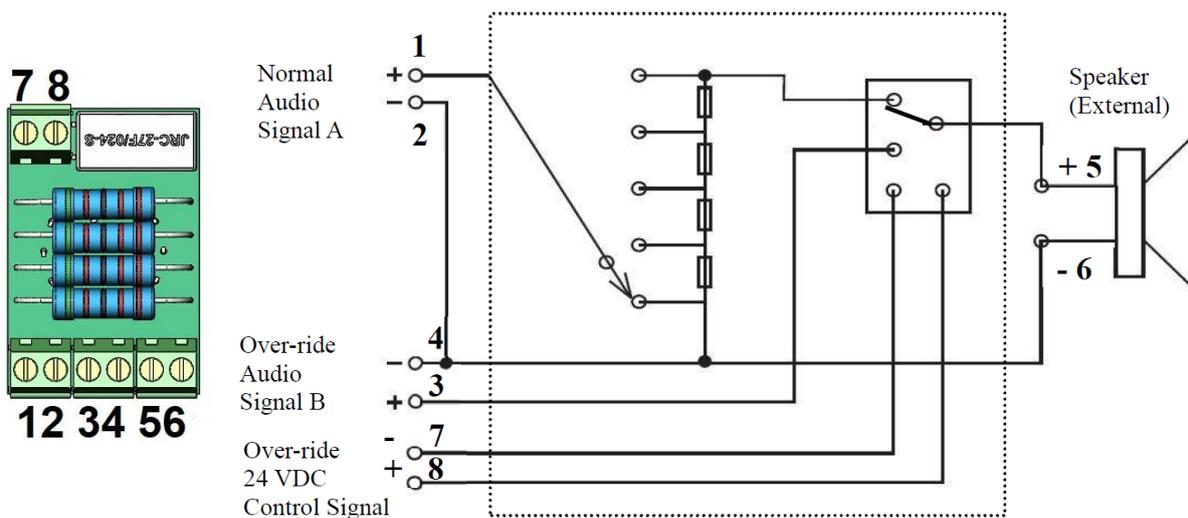

Note:

- For 70-100V constant voltage speaker system (Public Address system)
- Rotary 5-position selector with volume level and off position

Rotary position	Volume level*
OFF	OFF
1	10%
2	40%
3	75%
4	100%

*Audio level may vary on type of speaker

- When “Over-ride 24V Control Signal” is not activated, the internal switch shall connect “Normal Audio Signal A” to speaker via volume selector.
- When “Over-ride 24V Control Signal” is activated, the internal switch can connect speaker to “Over-ride Audio Signal B” with maximum loudness level (e.g., fire alarm or emergency broadcast)

Product Code	Colour
HC4301V	 White
HC4301V-SBL	 Matt Black (SBL)
HC4301V-MSB	 Matt Silver Black (MSB)
HC4301V-PS7	 Dark Champagne (PS7)
HC4301V-ST5	 Champagne Grey (ST5)
<i>For other colour, please contact T&J Sales representative</i>	

