

Product Code	Description
HC2721L-2DP	20AX 1 Gang 2 Way Double Pole Switch with indicator light



HC2721L-2DP



Product back view

Technical Specification

Rated Voltage: 250VAC, 50/60Hz

Rated Current: 20AX

Recommended wire size:
4mm² - 6mm²

Isolating Gap Contact: 3mm nominal

Contact Material: Sliver-Nickel Alloy

Operating Temperature:

-5°C to +40°C

IP Rating: IP2X

• Indicator light: Blue LED

• Dimensions: 86 x 86 x 10mm (WxHxD)

Fix Center: 60.3 mm

• Fix Screw: M3.5 x 0.6 x 30mm±

• Mounting box: >25mm depth

R1150, flush mounting, plastic(80 x 80 x 48.4mm) (WxHxD)

M1247, flush mounting, metal (79 x 73 x 47mm) (WxHxD)


• Comply to standards:


BS EN 60669-1

IEC 60669-1

GB/T 16915.1


Terminal Connection:







2-Way (double-pole) switching connection

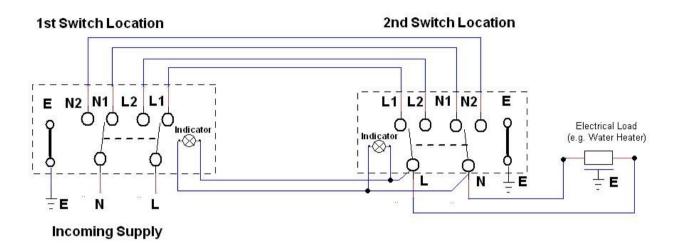

Product Code	Colour	
HC2721L-2DP	White	
HC2721L-2DP -SBL	Matt Black (SBL)	
HC2721L-2DP -MSB	Matt Silver Black (MSB)	
HC2721L-2DP -PS7	Dark Champagne (PS7)	
HC2721L-2DP -ST5	Champagne Grey (ST5)	
For other colour, please contact T&J Sales representative		

