


Product Code	Description
HC8318SDUSBC-DP	16A 2 Gang DP Universal Switched Socket Outlet with 2 Port USB Charger (3.6A Max, USBA+C)



HC8318SDUSBC-DP -ST5

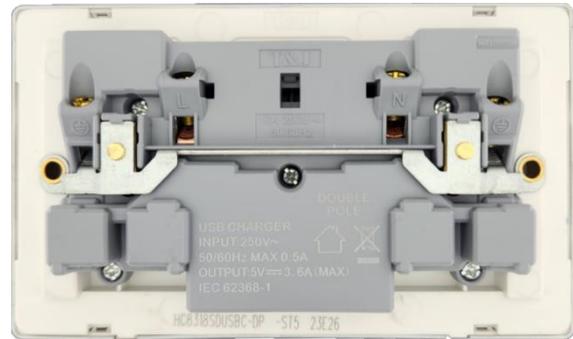

Product back view

Technical Specification

- Socket rated voltage: 250VAC, 50/60Hz
- Socket rated current: 13A (BS Plug)
- USB Charger input supply: 250V 50/60Hz, 0.5A max.
- USB Charger output: 5VDC/3.6A max. (USB-A + USB-C shared)
5VDC/2.1A max. (each USB port)
- USB Charger with built-in over-heat, overload and short-circuit protection
- Recommended wire size: 2.5mm² - 4mm²
- Double-pole switch (both L & N isolated from load when off)
- Dimensions: 146x86x10mm (WxHxD)
- Fix Center: 120.6 mm
- Fix Screw: M3.5x0.6x30±
- Mounting box: >35mm depth
 - M1047D, flush mounting, metal (135 x 75 x 47mm) (WxHxD)
- Comply to standards: BS EN 62368-1
BS 1363

Applicable on selected type of plugs:

Plug Type	Rating
2-pin Plug (Non-earth)	2.5A, 250V
2-pin Plug (Euro)	2.5A, 250V
2-pin Plug Round	10/16A, 250V
2-pin Plug (Non-earth)	10/16A, 250V
3-pin Plug (BS)	13A, 250V
3-pin Plug Round (BS)	5A, 250V
2-pin Australia Plug	7.5A, 250V
3-pin Australia Plug	10A, 250V
3-pin Australia Plug	15A, 250V
3-pin China Plug	6/10A., 250V
2-pin China Plug	6/10A., 250V

Product Code	Colour
HC8318SDUSBC-DP	 White
HC8318SDUSBC-DP-SBL	 Matt Black (SBL)
HC8318SDUSBC-DP-MSB	 Matt Silver Black (MSB)
HC8318SDUSBC-DP-PS7	 Dark Champagne (PS7)
HC8318SDUSBC-DP-ST5	 Champagne Grey (ST5)
<i>For other colours, please contact T&J Sales representative</i>	

