

Product Code	Description
E2102L-2	20A 250V 2 Gang 2 Way Switch with Indicator IP66



E2102L-2




Product back view


## Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 20AX
- SBL\*: 250W
- With indicator light (red LED)
- Recommended wire size:  
4mm<sup>2</sup> - 6mm<sup>2</sup>
- \*SBL - Self Ballasted Lamp
- IP66 – protected against dust and powerful water jets
- Dimensions: 83 x 83 x 68mm (WxHxD)
- Comply to standards:  
BS EN 60669-1  
IEC 60669-1  
GB/T 16915.1

## Switch Main Parts

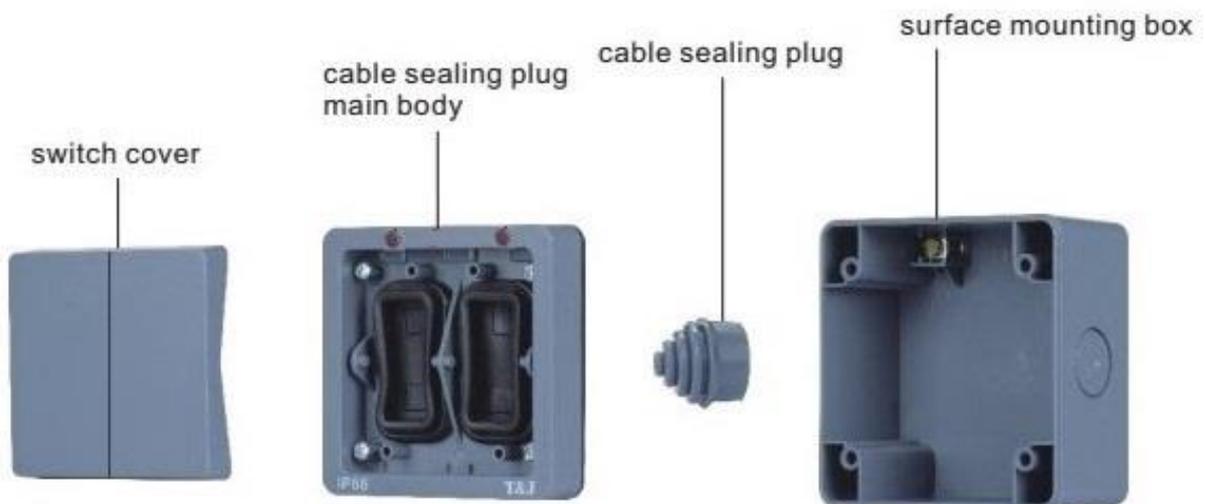


## Installation Method

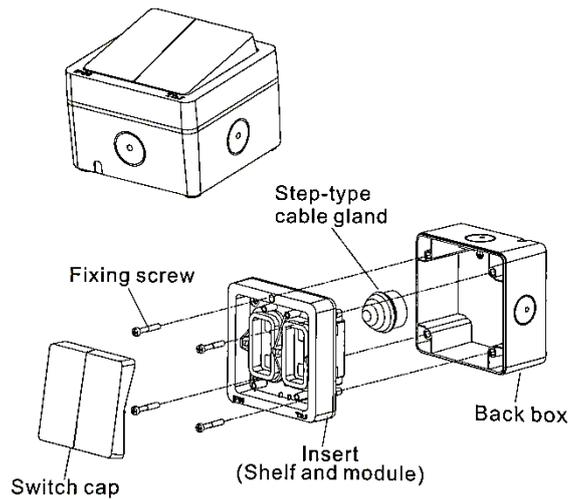


**Note:** When re-installing switch cap, observe orientation, left or right cap and in “up” position.

## Typical 2-way Switch Connections

### 2-Way Switching Circuit (Control 1 lighting point from 2 switch locations)

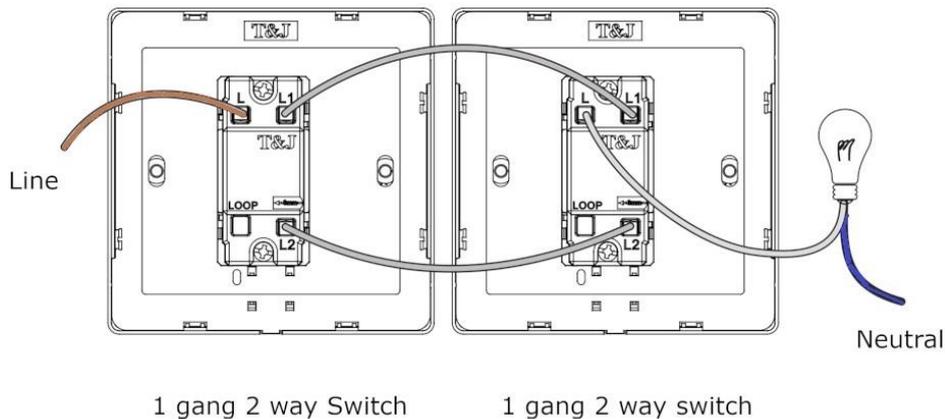

### 2-way Switching with Dark-on indicator light\*

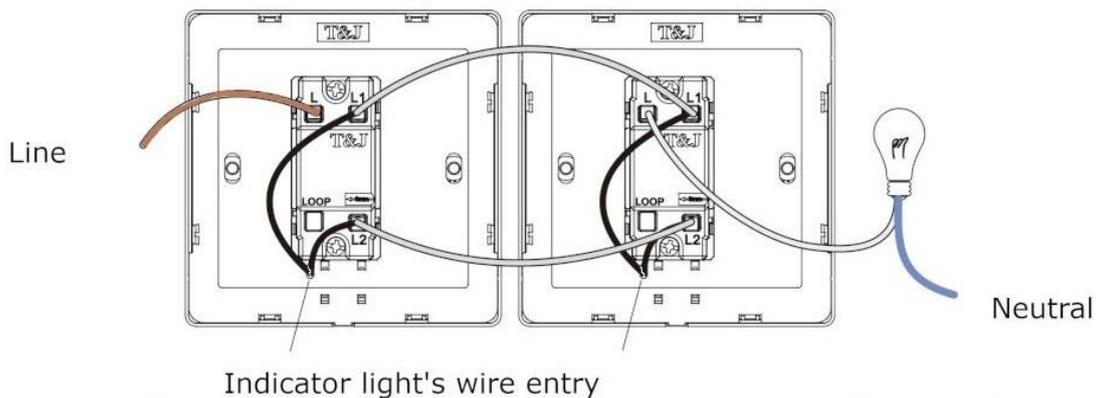

\*This connection may not work for low wattage (<5W) LED lamp load, the lamp may appear dimly lighted even if switched off.