

Product Code	Description
EB2711-B	10A 250V 1 Gang 1 Way Bell Switch



EB2711-B-MSL




Product back view

Technical Specification


- Retractive switch (momentary)
- Rated Voltage: 250V, 50/60Hz
- Rated Current: 10A
- Recommended wire size:
1.5mm² - 2.5mm²
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:
-5°C to +40°C
- IP Rating: IP2X
No. of operations: 40,000 at 10 Amp
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Fix Centre: 60.3mm
- Fix Screw: M3.5 x 0.6 x 23.5mm±
- Mounting box: >25mm depth
 - R1150, flush mounting, plastic (80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal (79 x 73 x 47mm) (WxHxD)
- Comply to standards:
BS EN 60669-1, IEC 60669
GB/T 16915.1

Typical wiring

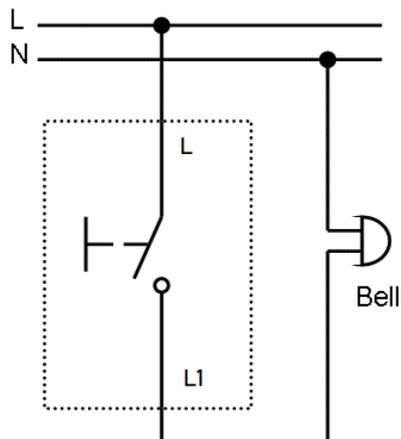

Note: "LOOP" terminal if present – no connection, use for Neutral wire loop if required

Installation Method

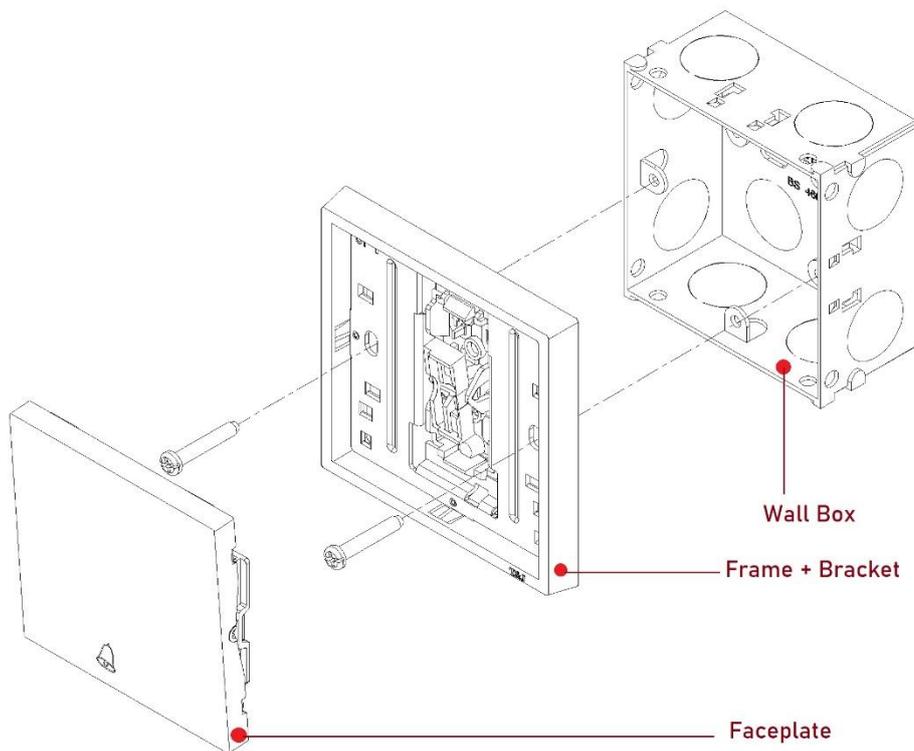

Product Code	Colour
EB2711-B	 White
EB2711-B-SBL	 Matt Black (SBL)
EB2711-B-MSB	 Matt Silver Black (MSB)
EB2711-B-MSL	 Matt Silver (MSL)
*For other colours, please contact T&J Sales representative	