


T&J ELECTRIC (SINGAPORE) PTE LTD

Company Registration No: 200205797Z 10 Ubi Crescent, #02-24, Ubi Techpark, Singapore 408564 Telephone: +65 6547-4333 Fax: +65 6547-4666

Date9/7/2020Subject :WEATHERPROOF ISOLATING SWITCH - TS SERIES (TM-020031.3)

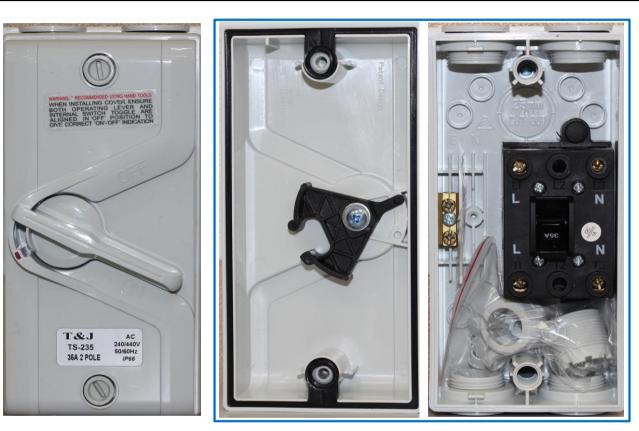

- * Designed for outdoor environment use
- * Included in the range are double and four pole switches from 20 to 63 Amps.
- * Cable entry knockouts are provided at the top and bottom of the enclosure

TECHNICAL SPECIFICATION

| Standard Specification |
|--|
| Number of Pole |
| Rated operational Current |
| Rated operational Voltage |
| Rated Frequency |
| Rated utilization Category |
| Rated short-circuit making capacity I_{CM} |
| Cable entry knockout |
| Degree of Protection |
| Terminal Bore |
| |

IEC 60947-3 & BS EN 60947-3 2P, 4P (3P is customizable) 20A, 35A, 63A 240/440VAC 50 / 60 Hz AC22A 3000A 25mm diameter IP66 5~6mm

PRODUCTS AVAILABLE

| | 20A | 35A | 63A |
|--------|-----------|-----------|-----------|
| 2-Pole | TS-220/T2 | TS-235/T2 | TS-263/T2 |
| 4-Pole | TS-420/T2 | TS-435/T2 | TS-463/T2 |



T&J ELECTRIC (SINGAPORE) PTE LTD

Company Registration No: 200205797Z 10 Ubi Crescent, #02-24, Ubi Techpark, Singapore 408564 Telephone: +65 6547-4333 Fax: +65 6547-4666

| Date | 9/7/2020 |
|-----------|---|
| Subject : | WEATHERPROOF ISOLATING SWITCH - TS SERIES (TM-020031.3) |

DIMENSION

- 1 Cables looped in and out from top of isolator
- 2 Cables in and out from bottom of isolator
- **3** Cables in and out straight through the isolator
- 4 Two 25mm rear knockouts are moulded in the base for surface mounting with concealed wiring

