

Product Code	Description
W2710	10A 250V 1 Gang 1 Way Bell Switch (Module)



W2710









Product back view





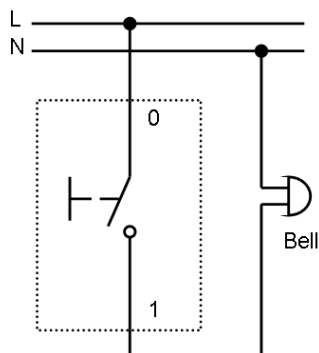




Technical Specification

- One Deco module size
- Retractive switch (momentary)
- Rated Voltage: 250V, 50/60Hz
- Rated Current: 10A
- Recommended wire size:
1.5mm² - 2.5mm²
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:
-5°C to +40°C
- IP Rating: IP2X
- No. of operations: 40,000 at 10 Amp.
- Dimensions: 40 x 23 x 30 mm (HxWxD)
- Mounting box: >35 mm
 - R1150, flush mounting, plastic
(80 x 80 x 48.4 mm) (WxHxD)
 - M1247, flush mounting, metal
(79 x 73 x 47 mm) (WxHxD)
- Comply to Standards:
IEC 60669
GB 16915

Typical connection method



Product Code	Colour
W2710	 White
W2710-SBL	 Matt Black (SBL)
W2710-ST	 Charcoal Black (ST)
W2710-MSB	 Matt Silver Black (MSB)
W2710-MSL	 Matt Silver (MSL)
<i>For other colours, please contact T&J Sales representative</i>	

Adapter plate for Deco module				
Series	Product Code			
	1 gang adapter plate	2 gang adapter plate	3 gang adapter plate	
deco	W1111 	W1112A 	W1113 	
infinitt	HC1231 	HC1232 		
HARMONY	EA1231 	EA1232 		
minimalist	EB1231 	EB1232 		
radiance	K1231-D 	K1201-D 		
Titanium	GC1231 	GC1221 		
Ultimate	G1231 	G1221 