

Product Code	Description
W8201HDMI	1 Gang HDMI Socket Outlet (Module)



W8201HDMI-MSL



Product back view

Technical Specification

Connector Electrical Specification:

- Operation Voltage: 40VAC max
- Current Rating: 0.5A per contact
- Contact Resistance: 30mΩ max.
- Insulation Resistance: 2000MΩ min.
- Dielectric Withstanding Voltage: 500VAC

Connector Material Specification:

- Shield: Brass
- Plating: Nickle
- Contact: Phosphor Bronze
- Contact area: Gold plating
- Solder Tail: Tin plating

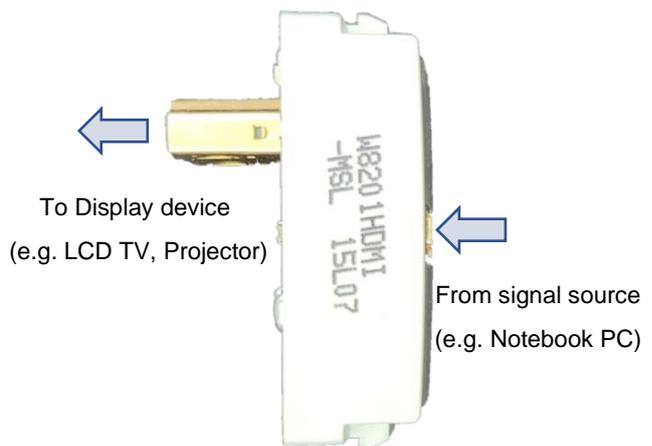
General Specification:

- Operating temp.: -20°C~+85°C
- One Deco module size
- Dimensions: 40 x 23 x 25 mm (approx.) (HxWxD)

To mount with suitable Adapter Plate:

- Mounting box: >40 mm*
 - R1150, flush mounting, plastic (80 x 80 x 48.4 mm) (WxHxD)
 - M1247, flush mounting, metal (79x 73 x 47 mm) (WxHxD)



*Allow room for bend radius of cable



Product side view

Note: HDMI connector does not have “version” unlike cable which affects the bandwidth of the connection.

Product Code	Colour
W8201HDMI	 White
W8201HDMI-SBL	 Matt Black (SBL)
W8201HDMI-ST	 Charcoal Black (ST)
W8201HDMI-MSB	 Matt Silver Black (MSB)
W8201HDMI-MSL	 Matt Silver (MSL)
<i>For other colours, please contact T&J Sales representative</i>	

Adapter plate for Deco module					
Series	Product Code				
	1 gang adapter plate	2 gang adapter plate	3 gang adapter plate		
deco	W1111 	W1112A 	W1113 		
infnit	HC1231 	HC1232 			
HARMONY	EA1231 	EA1232 			
minimalist	EB1231 	EB1232 			
radiance	K1231-D 	K1201-D 			
Titanium	GC1231 	GC1221 			
Ultimate	G1231 	G1221 			